





TECHNICAL SHEET




Next Hydraulics



DIMENSIONS			
CRANE	A	B1	B2
260.1	61"	32"	34"
260.2	61"	32"	34"
260.3	61"	32"	34"

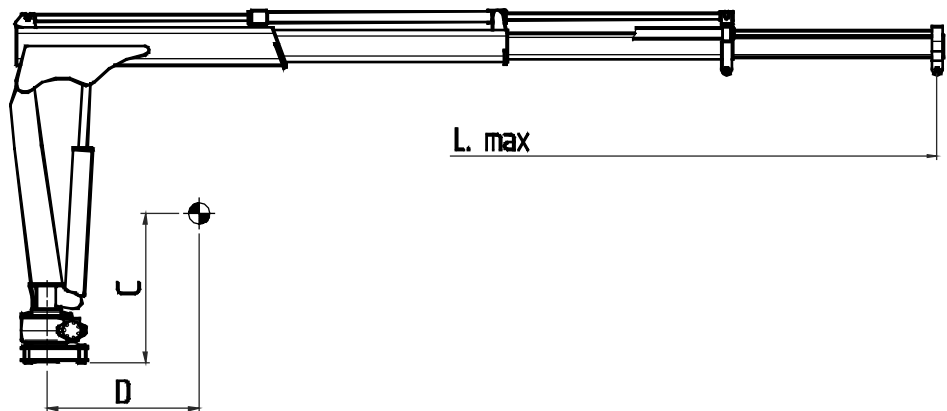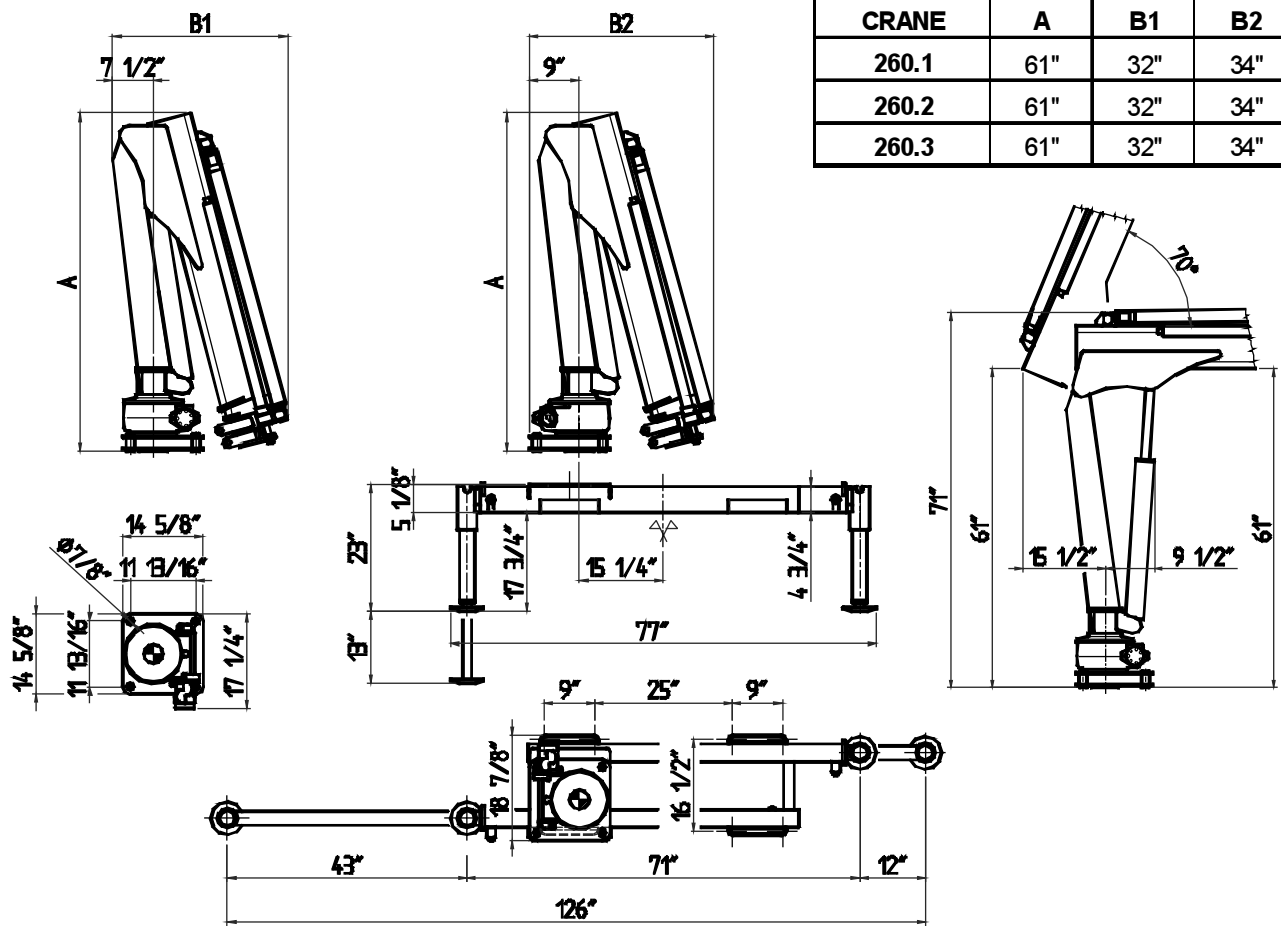

CRANE	A	B	C	D	L max
260.1	20"	5"	26"	20"	130"
260.2	20 1/2"	6"	27 1/2"	24"	130"
260.3	22"	7"	32"	33"	172"

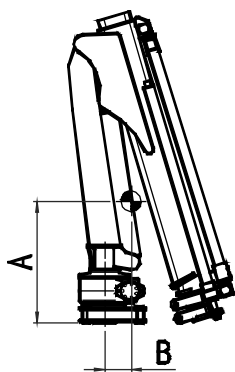



TECHNICAL DATA		VERSION			
TYPE		260	260.1	260.2	260.3
CRANE RATING		ft. lbs.	18,500		
STANDARD EXTENSIONS Nr (HYDRAULICS - MANUALS)		n°	1H +1M	2H	3H
STANDARD OUTREACH		ft.	10' 10"	10' 10"	14' 4"
SLEWING ANGLE		°	360°		
MAXIMUM ANGLE SLOPE		°	4°		
SLEWING TORQUE		ft. lbs.	2,600		
MAX. LIFTING HEIGHT FROM CRANE BASE		ft.	14' 9"	14' 9"	18'
SUGGESTED OIL FLOW		gpm.	2.6 – 3.1		
MAX. WORKING PRESSURE		psi	2,750		
BASIC CRANE WEIGHT	VERS. "H"	lbs.	470	495	550
	VERS. "E"		520	540	595
BASE WEIGHT WITH EXTENDABLE STABILIZERS		lbs.	265 - 285		
BEAM WEIGHT WITH 2 EXTENDABLE STABILIZERS		lbs.	110		
MOTOR ABSORPTION FOR ELECTROHYDR. CRANE 12V	A				
	min/max	80/250	80/250	80/250	
MOTOR ABSORPTION FOR ELECTROHYDR. CRANE 24V	A				
	min/max	50/120	50/120	50/120	
WINCH SPECIFICATIONS		U.M.			
MAX. WINCH SINGLE LINE CAPACITY (3 rd LAYER)		lbs.	1,550		

VERSION	DESCRIPTION
"E" 12V	ELECTROHYDRAULIC
"E" 24V	ELECTROHYDRAULIC
"H"	HYDRAULIC (PTO)

OPERATING TIMES										
VERSION	SLEWING (rpm)	LIFTING (sec)		LOWERING (sec)	EXTENSION OUT (sec)			EXTENSION IN (sec)		
		Pmin	Pmax		260.1	260.2	260.3	260.1	260.2	260.3
260 "E" 12/24V	1.5	23	35	18	12	25	35	9	16	26
260 "H" (P.T.O)	1.8	16		18	12	25	35	9	16	26

Pmax: max. working pressure
Pmin: min. working pressure

Lifting class **H2-B3**
DIN 15018

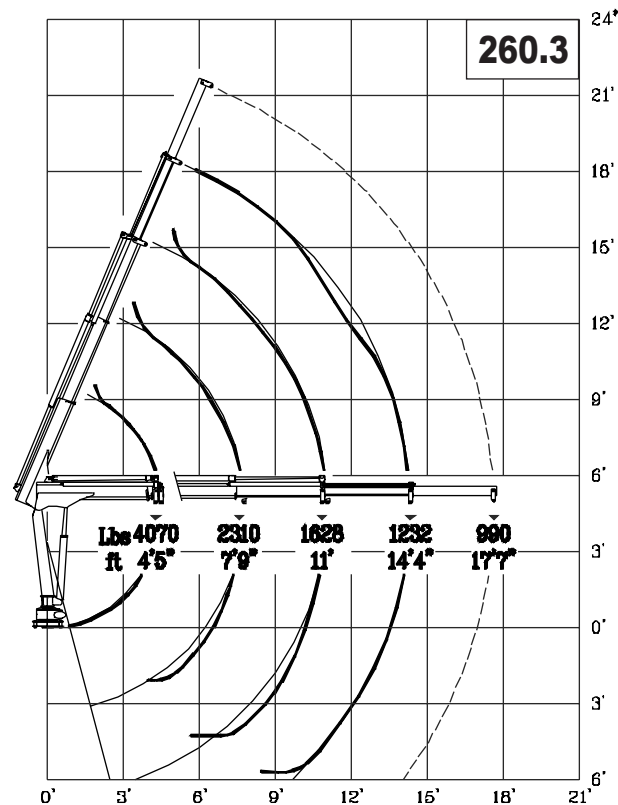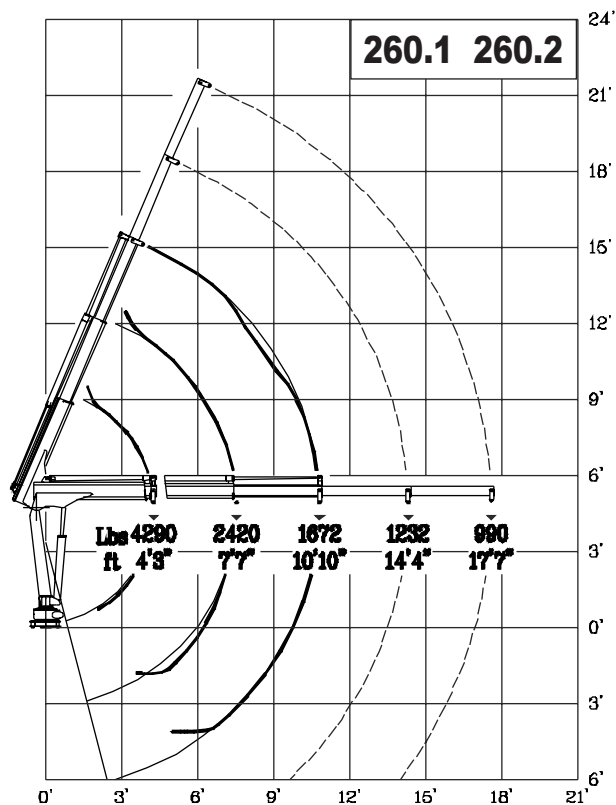

maxilift

by

Next Hydraulics



Via Mediterraneo n°6, 42022 Boretto (R.E.) Italy

Tel.: 0522-963008, Fax: 0522-963039

<http://www.nexthydraulics.it> E-mail: nexthydraulics@tin.it