6000H & T6000E

The TIGER T6000 ELECTRO-HYDRAULIC and HYDRAULIC cranes are the most versatile of the TIGER crane line. The T6000 cranes are a natural choice for field service applications, because they can be mounted on trucks with a GVW as small as 14,500 lbs., yet easily handle 6000 lb. loads all day long. The TIGER T6000 cranes feature boom elevation from -5° to +75°, limited continuous rotation, standard overload protection, and a reach to 18 ft., making them adaptable enough to tackle your most awkward jobs.

The T6000EH incorporates a 12 V DC hydraulic power unit to perform lift, extend and rotation functions, and an electric winch for hoisting duties. The T6000H is a fully hydraulic crane, using hydraulic power supplied by the vehicle to operate the lift, extend, rotation, and winch functions. The T6000H is available with proportional control. Both cranes are available with an anti-two-block preventer and an optional length mannual jib.

TIGER Model T6000H & T6000EH **Specifications**


Crane Rating ft/lbs./(Kg/M) 31,000 (4,286) Lifting Capacity lbs./(kg) 6,000 (2,727) Lifting Height (from base) in./(cm) 216 (549) Storage Height (from base) in./(cm) 39 (99) Rotation (limited continuous) 360° Winch Cable 5/16 in. x 70 ft. Weight lbs./(kg) 1,480 (660) Mounting Space in./(cm) 16.6 x 16.6 (42 x 42) Outrigger Recommendation OR-1 or OR-2 Heavy Duty or Equivalent Controls: Detachable Remote 25 ft. of Control Cable

MINIMUM CHASSIS REQUIREMENTS

GVW RATING 14,500 lbs 5,000 Kg HYD PUMP 6 GPM @ 2500 PSI ALTERNATOR 60 Amp BATTERY (Cold Crank) 700 133 in 152 cm WHEEL BASE **BATTERY 200 Minute Reserve** CAB TO AXLE 60 in 152 cm Meets ANSI Requirements

TIGER CRANES ARE NOT INTENDED TO BE USED IN

THE LIFTING OR MOVING OF PERSONS.

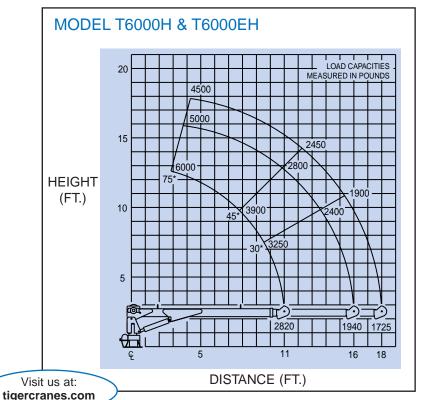

877 1ST AVE NW • SIOUX CENTER IA 51250 PHONE: 712-722-3711 • FAX: 712-722-3706

FOR THE NAME OF THE NEAREST TIGER CRANE DISTRIBUTOR CALL TOLL FREE 1-800-225-8789





